Product Specifications

Product Name	UV Picosecond Laser
Model	Topaz 355-60




60W Series UV Picosecond Laser Topaz 355-60

1. Specifications


Model	Topaz 355-60
Wavelength	355nm
Base repetition rate	700kHz
Pulse repetition rate	1kHz – 1MHz
Pulse Width	<15ps
Average Power	>60W@700kHz
Maximum Pulse Energy	>86uJ@700kHz
Average Power Stability	<1.0% rms over 8hours
Pulse-to-Pulse instability	<1.5% rms
Burst Mode	2-10 pulse selectable
Beam Quality	M^2 < 1.2
Beam Divergence	≤2mrad (Full Angle)
$1/e^2$ Beam Diameter	2.4± 0.3 mm(@output windows 50cm)
Beam Roundness	>93%
Polarization Direction	Horizontal
Polarization Ratio	>100:1
Pointing stability	<50urad
External Trigger	Gate/Trig/POD
Cooling	Water-cooling (22℃)
Ambient Temperature	20 – 30℃
Relative humidity	10%-80% (non-condensing)
Warm-up Time	<20 min
Operating Voltage	110 – 260V/AC
Laser head weight	<60kg
Rated power	<1500VA

2. Mechanical Schematic

(1) Laser Head Dimensions (mm)

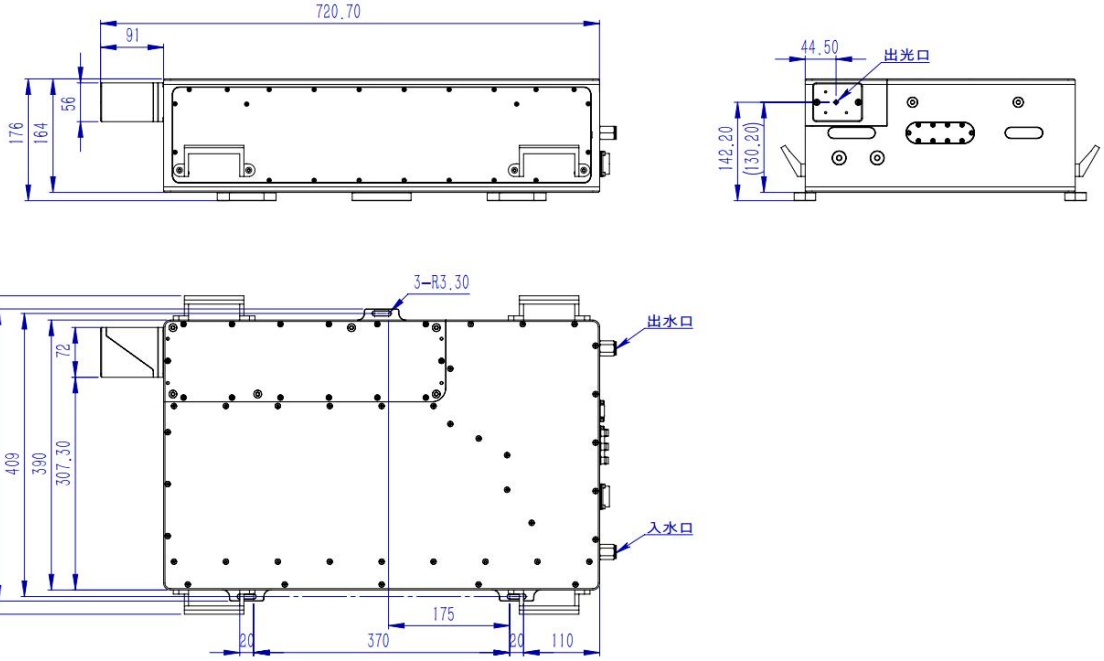

(2) Power Supply Dimensions (mm)

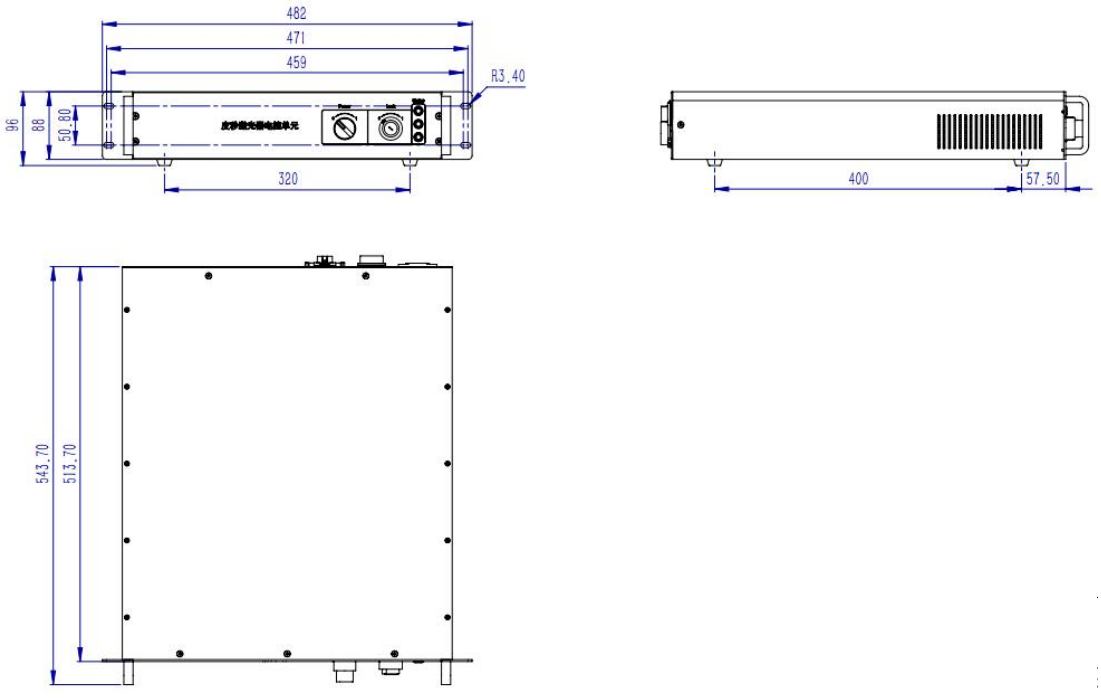

3. Typical Performance Data

