
V-groove Fiber Array

AUVC-16/32/48/64/96/128

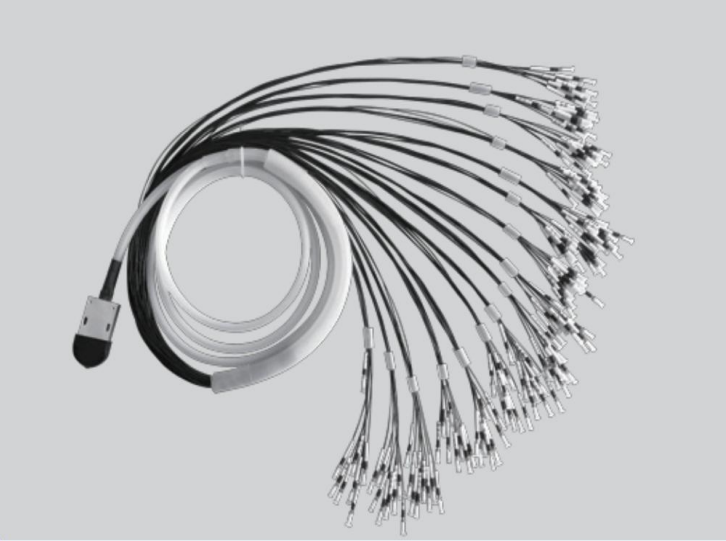


Features:

- 405nm wavelength
- 40 μm/50 μm /60 μmfiber core diameter
- 0.22 NA

Applications:

- Printing application
- Scientific research

Package Dimensions (mm)

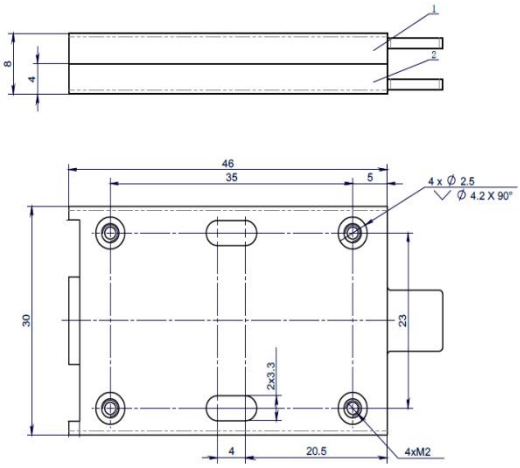



V-groove Fiber Array

AUVC-16/32/48/64/96/128

Specifications	Unit	AUVC-16/32/48/64/96/128
Fiber Center Interval	μm	125
Vertical Precision of Fiber Position	μm	±4
Transmissivity	-	>90%
Fiber Numbers	-	16/32/48/64/96/128
Fiber Core Diameter	μm	40/50/60
Fiber Cladding Diameter	μm	125
Fiber Buffer Diameter	μm	250
Fiber Jacket Diameter	μm	900
Numerical Aperture	-	0.22
Fiber Length(1)	m	1.0
Fiber Connector	-	**F-ferrule**

Customized fiber length available

Declaration : information and specifications contained herein are deemed to be reliable and accurate. Hyperline reserves the right to change, alter or modify the design and specifications of these products at any time without notice.26-10