
785nm 0.6W Wavelength-Stabilized Fiber Coupled Diode Laser

K785AFLFN-0.600WY2N-10522F10EFC (Standard Product)

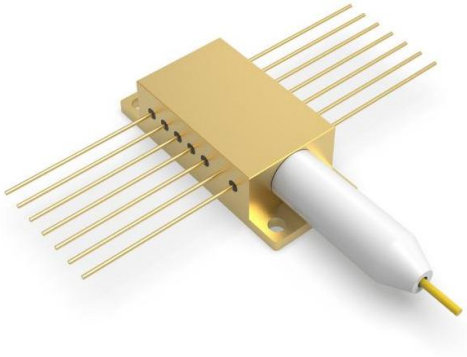


Features:

- 785±0.5nm wavelength
- 0.6W output power
- 105μm fiber core diameter
- 0.22 NA

Applications:

- Raman detection
- Scientific research

Package Dimensions (mm)

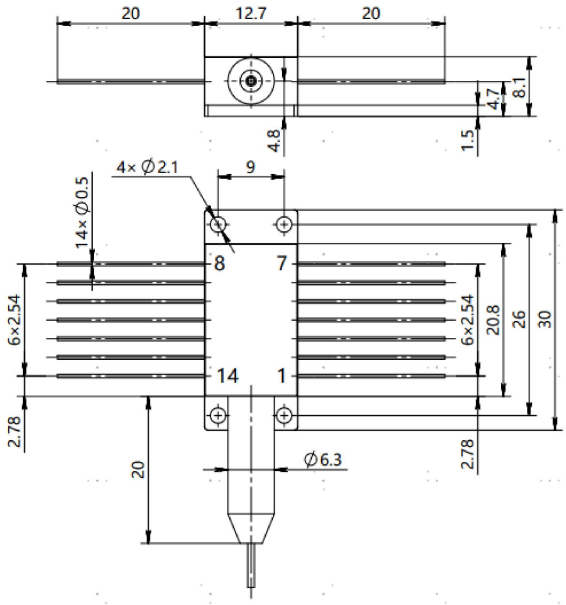

Pin	Function
1	TEC (+)
2	Thermistor
3	PD(+)
4	PD(-)
5	Thermistor
6-9	-
10	LD (+)
11	LD (-)
12	-
13	Case
14	TEC (-)

OPERATING NOTES

- Avoid eye and skin exposure to direct radiation during operation.
- ESD precautions must be taken during storage, transportation and operation.
- Short-circuit is required between pins during storage and transportation.
- Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the middle of the pins. Soldering temperature should be lower than 260℃ and time shorter than 10 second.
- Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- Use constant current power supply to avoid surge current during operation.
- Laser diode must be used according to the specifications.
- Laser diode must work with good cooling.
- Operation temperature ranges from 23℃ to 27℃ .
- Storage temperature ranges from -20℃ to +70℃.



785nm 0.6W Wavelength-Stabilized Fiber Coupled Diode Laser

K785AFLFN-0.600WY2N-10522F10EFC (Standard Product)

Specifications (25℃)		Symbol	Unit	K785AFLFN-0.600W		
				Minimum	Typical	Maximum
Optical Data(1)	CW Output Power	P_o	W	0.6	-	-
	Center Wavelength	l_c	nm	785±0.5		
	Spectral Width(FWHM)	△l	nm	-	0.1	0.12
	Wavelength Shift with Temperature	△l/△T	nm/℃	-	0.02	-
	Wavelength Shift with Current	△l/△A	nm/A	-	0.03	-
Electrical Data	Electrical-to-Optical Efficiency	PE	%	-	30	-
	Threshold Current	I_{th}	A	-	0.4	-
	Operating Current	I_{op}	A	-	1.1	1.5
	Operating Voltage	V_{op}	V	-	1.8	2.2
	Slope Efficiency	η	W/A	-	0.8	-
Fiber Data	Core Diameter	D_{core}	μm	-	105	-
	Cladding Diameter	D_{clad}	μm	-	125	-
	Numeric Aperture	NA	-	-	0.22	-
	Fiber Length	L_f	m	-	1.0	-
	Fiber Loose Tubing Diameter	-	mm	0.9		
	Minimum Bending Radius	-	mm	50	-	-
	Fiber Termination	-	-	FC		
Thermistor		Rt	(KΩ)/β(25℃)	10±3%/3477		
PD Data	Current	I_{mo}	μA	50		1000
TEC Data	Max. Current	I_{tec}	A	-	-	2.2
	Max. Voltage	V_{tec}	V	-	-	8.7
Others	ESD	V_{esd}	V	-	-	500
	Storage Temperature(2)	T_{st}	℃	-20	-	70
	Lead Soldering Temp	T_{ls}	℃	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature(3)	T_{op}	℃	23	25	27
	Relative Humidity	RH	%	15	-	75

(1) Data measured under operation output at nominal output power@25℃.

(2) A non-condensing environment is required for operation and storage.

(3) Operating temperature defined by the package case. Acceptable operating range is 23℃~27℃, but performance may vary.

Declaration : information and specifications contained herein are deemed to be reliable and accurate. Hyperline reserves the right to change, alter or modify the design and specifications of these products at any time without notice.26-09